

## 4 - 2 COAL CONVERSION BY SUPERCRITICAL WATER

Keywords : supercritical water, coal, conversion,  
fuel, monohydric phenols, dihydric phenols

H. Shimoda, Center for Coal Utilization Japan  
H. Tanaka, S. Hasegawa, T. Murayama, K. Nishimura  
and Y. Miyashita , Mitsubishi Materials Co.

A coal conversion process using supercritical water (SCW) was proposed and the experimental work has been performed. In this process, SCW acts as not only a solvent, but also a reactant for coal hydrolysis. Significant results from the examinations indicate that the process has a potential for the utilization of coal conversion, because it appears probably more economical and environmentally acceptable than the other proposed processes of coal conversion. Particularly, SCW process can be applied for the conversion of low rank coals, which are almost not utilized at present due to their high concentrations of water and oxygen.

In this SCW process, phenols were found as the major components in water-soluble (WS) product. Of particular interest is that a considerable portion of expensive dihydric phenols, such as catechol, was detected in the WS product. Moreover the residue and water-insoluble (WI) product by this process can be used as the qualified fuel because it has low ash content, high calorific value and rapid combustion rate.

A process testing work is now being conducted to obtain engineering data of reaction, separation and so on. In this paper, the experimental results related to the separation of products are reported. On the basis of these results, the industrial flow of this process is suggested.

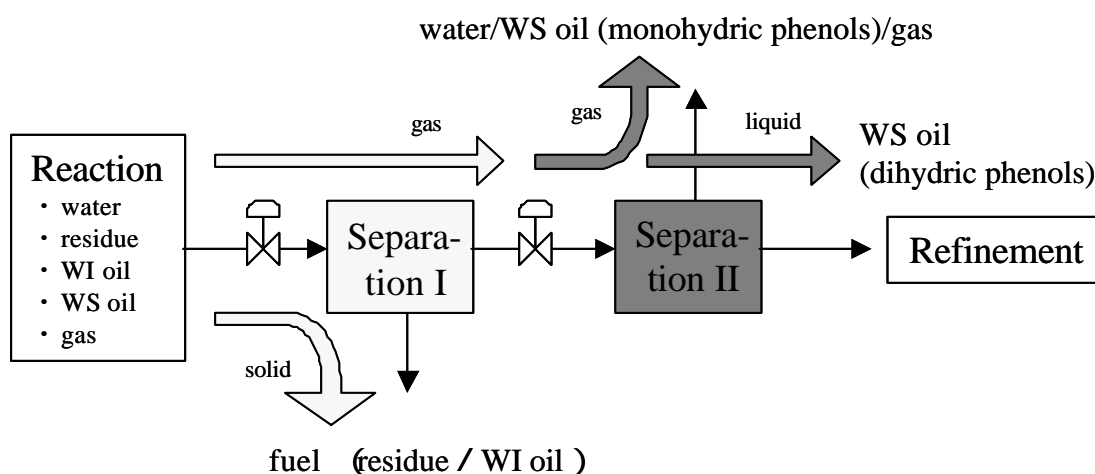


Fig. A flow of separation system